



Control Cube 165

TFT Display Wall Charger with Foldable Plug

QUICK GUIDE

Control Cube 165

TFT Display Wall Charger

Intelligent power distribution.

Up to 165W across 4 devices,

PPS precision and GaN efficiency.

165
WATT

Compatible
devices



Laptop



Tablet



Smartphone



TWS

FOLDABLE
PLUG

OPTIMIZED FOR
COMPACT
STORAGE



Premium cable
USB-C to USB-C
included

1,5m
LENGTH

SPACE SAVING



PD PPS

USB-C 1 140W max
OUT

USB-C 2 100W max
OUT

USB-C 3 20W max
OUT

AFC
USB-A 18W max
OUT

Active Matrix Display


TFT screen with real-time views

DISPLAY INTERFACE

OVERALL OUTPUT
POWER OVERVIEW
TEMPERATURE STATUS
CHARGING TIME



90° DISPLAY
ROTATION
FOR HORIZONTAL
AND VERTICAL
SOCKETS



TOUCH CONTROL
BUTTON

TAP x1:
SWITCH VIEWS
PRESS 2s:
TURN DISPLAY


AUTOMATIC
STANDBY MODE
WHEN NO DEVICE
IS CONNECTED




Intelligent Power Distribution

Multi-port output allocation

Two-Ports Charging

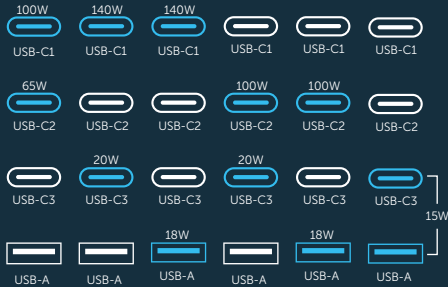

Three-Ports Charging



Four-Ports Charging



Technology Guide

Charging standards overview

PD

POWER
DELIVERY

Universal fast charging standard via USB-C. Delivers higher power safely and efficiently across compatible devices.

PPS

PROGRAMMABLE
POWER SUPPLY

Advanced voltage regulation protocol. Optimizes power output dynamically for stable and efficient charging.

AFC

ADAPTIVE
FAST CHARGE

Samsung fast charging technology. Adjusts voltage and current for compatible devices.

Integrated Protection System



Overvoltage
protection



Overheating
protection



Short-circuit
protection

POWER WHAT MATTERS

Control Cube 165

TFT Display Wall Charger with Foldable Plug

Specifications:

Input: 100-240 V AC 50/60 Hz 2,3 A Max

USB-C1 Output: 5,0 V DC 3,0 A / 9,0 V DC 3,0 A / 12,0 V DC 3,0 A / 15,0 V DC 3,0 A / 20,0 V DC 5,0 A / 28,0 V DC 5,0 A (PD 140,0 W)

USB-C2 Output: 5,0 V DC 3,0 A / 9,0 V DC 3,0 A / 12,0 V DC 3,0 A / 15,0 V DC 3,0 A / 20,0 V DC 5,0 A (PD 100,0 W)

USB-C3 Output: 5,0 V DC 3,0 A / 9,0 V DC 2,22 A / 12,0 V DC 1,67 A (20,0 W)

USB-A Output: 5,0 V DC 3,0 A / 9,0 V DC 2,0 A / 12,0 V DC 1,5 A (18,0 W)

USB-C1 + USB-C2 Output: 100,0 W + 65,0 W | USB-C1 + USB-C3 Output: 140,0 W + 20,0 W

USB-C1 + USB-A Output: 140,0 W + 18,0 W | USB-C2 + USB-C3 Output: 100,0 W + 20,0 W

USB-C2 + USB-A Output: 100,0 W + 18,0 W | USB-C3 + USB-A Output: 5,0 V DC 3,0 A (15,0 W)

USB-C1 + USB-C2 + USB-C3 Output: 100,0 W + 45,0 W + 20,0 W

USB-C1 + USB-C2 + USB-A Output: 100,0 W + 45,0 W + 18,0 W

USB-C1 + USB-C3 + USB-A Output: 140,0 W + 5,0 V DC 3,0 A max (15,0 W)

USB-C2 + USB-C3 + USB-A Output: 100,0 W + 5,0 V DC 3,0 A max (15,0 W)

USB-C1 + USB-C2 + USB-C3 + USB-A Output: 100,0 W + 45,0 W + 5,0 V DC 3,0 A max (15,0 W)

Total Output: 165,0 W max

3,0 A Cable: Connector 1/2: USB-C 2.0 | Cable length: 150 cm / 5 ft

uniquo-tech.com


SBS spa

Via Circonvallazione s/n
28010 Miasino (No) Italy



**GALLIUM NITRIDE
TECHNOLOGY**

High-efficiency
semiconductor material.
Allows compact design
with improved power
performance.



REV0_07_26

Follow us on:

customercare@uniquo-tech.com